

FlexiStraps

Flexibore® installation accessory




Power cable secured with FlexiStraps



Clove-hitch method

Flexibore is manufactured with a coloured strip, making cable attachment loops to secure your power cable. **FlexiStraps** are the suggested attachment method for longer power cables over 150 m deep instead of cable ties.

- **FlexiStraps** are 2 mm thick and approximately 18 mm wide.
- Each strap is fitted with a tri-glide strap adjuster and a Camlock buckle.
- The strap length is proportionate to the hose diameter.
- The strap is first tied to the power cable then slipped through the loop attachment point the same way a belt slips through belt loops before being secured by the buckle.
- One **FlexiStrap** is used at each cable attachment loop.

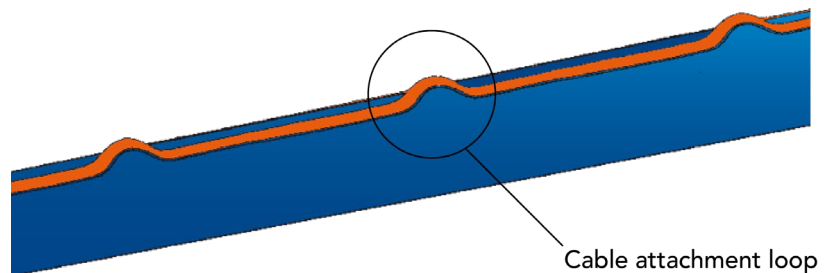

Flexibore has a coloured strip with cable attachment loops to secure your power cable using the recommended method.



Scan here to learn more

FlexiStraps

Hose diameter (ID)	40 mm	51 mm	76 mm	102 mm	127 mm	152 mm	203 mm	254 mm
	1.5"	2"	3"	4"	5"	6"	8"	10"
Weight/each	0.02 kg	0.03 kg	0.04 kg	0.05 kg	0.06 kg	0.07 kg	0.08 kg	0.09 kg
Part #	ACF050KRB	ACF055KRB	ACF085KRB	ACF100KRB	ACF115KRB	ACF130KRB	ACF180KRB	ACF200KRB

Crusader Hose Pty Ltd

22 Industry Place, Bayswater VIC 3153 Australia
 e: sales@crusaderhose.com.au p: +61 3 9720 1100
www.crusaderhose.com.au

2408

Crusader Hose reserves the right to modify any specification as part of ongoing product development and without prior notice.

Contact Crusader Hose to ensure that the current technical data sheets and documentation are used.

